

# Review on Research Progress of Hydraulic Powered Soft Actuators

Hu Shi \*, Kun Tan, Boyang Zhang and Wenqiao Liu

School of Mechanical Engineering, Xi'an Jiaotong University, Xi'an 710049, China

\* Correspondence: tigershi@mail.xjtu.edu.cn; Tel.: +86-29-82663870

**Abstract:** Soft actuators have received extensive attention in robotics and smart device applications due to their distinctive dexterity and compliance. Among them, hydraulic soft actuators play an important role in the area because they have much higher specific power and power density than other types such as pneumatic soft actuators. Nevertheless, the deformation of flexible materials in soft actuators brings about inherent hysteresis and nonlinearity, which severely hinders them from producing the desired movement in the presence of advanced control strategies. In this paper, previous research efforts made to enhance the driving capability and actuation efficiency of hydraulic soft actuators are illustrated and analyzed from the three aspects of architecture, materials, and control strategy. Meanwhile, the issues and challenges that have emerged when developing hydraulic soft actuators are discussed. Finally, the potential future development of hydraulic powered soft actuators is discussed.

**Keywords:** soft actuator; hydraulic drive; smart material; hysteretic nonlinearity; control strategy



**Citation:** Shi, H.; Tan, K.; Zhang, B.; Liu, W. Review on Research Progress of Hydraulic Powered Soft Actuators. *Energies* **2022**, *15*, 9048. <https://doi.org/10.3390/en15239048>

Academic Editor: Senentxu Lanceros-Mendez

Received: 5 November 2022

Accepted: 27 November 2022

Published: 29 November 2022

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction


Soft actuators have attracted more and more attention in comparison to traditional rigid actuators because of their broad application scenarios, plentiful degrees of freedom, and adaptability [1,2]. Based on biomimetic information, soft actuators typically consist of soft elastic materials that may cause significant structural strain and mimic the structure and motion of soft animals such as octopuses, fish, and worms. Finally, the flexible, safe, and efficient performance is realized in some special working scenarios [3–9]. As an emerging actuator system, a soft actuator generally has the advantages of high flexibility, continuous deformation, safe human–machine interaction, and good environmental adaptability, and have been used in industrial robots, environmental exploration, medical rehabilitation, and other fields [10–13].

The soft actuation methods mainly include pneumatic actuation, hydraulic actuation, cable actuation, etc. Among them, the cable actuation can keep the driver (motor) with a large mass away from the end effector. Through reasonable arrangement, the inertia of the end effector can be reduced and the dynamic performance can be improved [14,15]. However, due to the disadvantages of low transmission efficiency and a high maintenance cost, it is rarely used in practical applications. Due to their affordability and stability, pneumatic actuation and hydraulic actuation have emerged as the two most popular methods in the research community. The pneumatic actuation has the characteristics of a high speed, simple system structure, convenient maintenance, and low price [16,17]. It is seen as the most economical way to use the pneumatic actuator to power the soft actuation system [18]. Any compressed gas system, however, suffers from intrinsic efficiency losses and limited load-bearing capacity because of the dramatic compressibility. The quick, accurate actuation control of the gas, which frequently necessitates the assistance of sensors and feedback systems, is what makes pneumatic actuators work with a quick response. In contrast, liquids can be roughly taken as incompressible matter, which promotes an improvement in the dynamic behavior of an actuator and guarantees higher drive efficiency.

In this paper, taking the hydraulic powered soft actuation devices into account, the current status of development of hydraulic soft actuation is systematically illustrated and analyzed from the three aspects of architecture, materials, and control. The design methods and control strategies for improving the energy transforming efficiency of hydraulic soft actuation technology and the possible future development trends are discussed.

## 2. Configuration and Structures

The operation of a hydraulic soft actuator typically involves the generation of working pressure in an elastic cavity using a liquid medium such as water or oil, and the formation of the desired movement under the influence of a cavity structure constraint and external loads. The structure of a hydraulic soft actuator can be classified as fiber constrained, cavity constrained, etc., depending on the various types of constraint. The capability of hydraulic soft actuators to drive can be impacted by several structural factors. Driven by hydraulic pressure, different actuator structures can produce different motion forms such as elongation, contraction, bending, torsion, spiral, etc., so as to adapt to different working requirements, as shown in Figure 1.

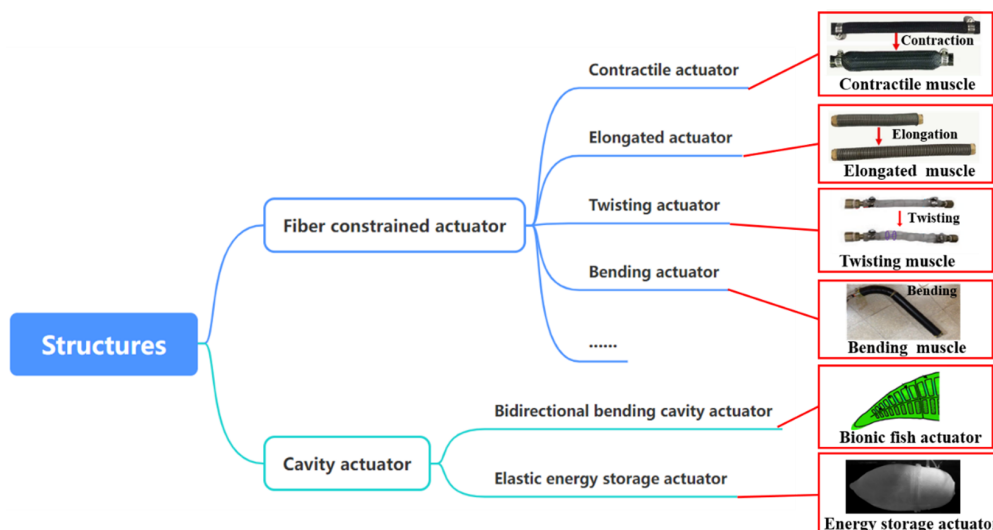

**Figure 1.** Configuration and structures of hydraulic powered soft actuators [19–27].

### 2.1. Fiber-Constrained Actuator

The earliest proposed artificial muscle structure is a fiber-constrained soft actuator, which is primarily made of an inner hose and an outer wrapped fiber-restrained material [19]. The shape of the muscle changes as the inner hose is filled with high-pressure fluid, and the appropriate displacement and elastic force are outputted. According to the working principle, artificial muscles (AMs) can be divided into contractile and elongated types. Zhao W D et al. [20] designed a retractable and elongated hydraulic artificial muscle manipulator. The inner elastic rubber tube of the contractile muscle is encased in a braided sheath. Due to the preload provided by the braided sheath, the muscle expands radially and contracts axially when the high-pressure liquid is placed in the tube. Elongated muscles consist of an inner elastic rubber tube and an outer spring. Due to the spring's limitation of the inner tube, the muscle lengthens axially rather than radially when the high-pressure liquid is injected into the tube. A contractile AM is used to create a manipulator that can work under extreme pressure and provide powerful pulling and grabbing forces. Bending under 0.8 MPa pressure, the horizontal projection is 50% of the natural length. Although it can only function under low pressure, the manipulator made of an elongated AM is more flexible and can be bent into a semicircle under 0.3 MPa during the test.

On the basis of the classic fiber-constrained artificial muscle structure, researchers have changed the winding and arrangement of one or more groups of fibers, and in-

roduced new manufacturing processes or materials, which makes the type of actuator exhibit more diverse and excellent characteristics and its application has higher flexibility. Chen S et al. [21] proposed a new method to fabricate a hydraulic soft actuator by changing the number of operations of reinforcing fibers on the actuator, which constitutes a fiber-guided actuator (FGA) driven by water pressure, used for bending, twisting, and even other movements. Experiments show that the FGA's pressure resistance increases as the number of fibers increases. The confinement band with a smaller bandwidth can provide a wider range of torque and a greater bending deformation; the maximum torque is close to 0.063 Nm. Phan P T et al. [22] proposed a bio-inspired soft hydraulic filament artificial muscle (HFAM) that can stretch and contract under fluid pressure. An HFAM has a high aspect ratio of at least 5000, a straightforward and inexpensive insertion production process, and high elongation and energy efficiency ratings of 246.8% and 62.7%, respectively. Drimer N et al. [23] introduced a hydraulic equal-strain linear muscle (HELM) composed of two different materials that deflects when internal pressure is applied. To reduce hysteresis and improve driving efficiency, HELM permits the choosing of the strain range that the active material exhibits. Based on the characteristics of premade materials, HELM constructed of nitrile rubber has a 160% elongation.

Fiber-constrained soft actuators generally have the advantages of a simple structure, high output ratio, and high working pressure. Since the fiber structure bears and transmits the main load during work, its maximum bearing pressure is also different according to the difference in fiber distribution density. In practical applications, fiber-constrained soft actuators are the most widely used type of actuator.

## 2.2. Cavity Actuator

The main structure of the cavity hydraulic soft actuator is composed of elastic rubber materials with low elastic modulus and good stretch ability. Under the action of liquid pressure, the cavity is distorted, producing a corresponding displacement and output force. Because a cavity actuator is more in line with the characteristics of bionics, it has promoted the birth of many bionic actuators. Jiao L et al. [24] designed a bionic robotic fish with a hydraulic soft actuator mechanism that replicated the fish's S-shaped swing using two joints. The average cruising speed of the two-joint soft robotic fish is 0.29 fish length/s, according to experiments, which is faster than the average speed of the single-joint robotic fish under the same frequency and caudal fin swing. Katschmann, R.K. et al. [25] proposed a hydraulic soft robotic fish. The robotic fish actuators mimic the tail of a fish, including the rear handle and caudal fin. By driving the two lateral cavity structures on each side, the continuous bending of the tail of the robotic fish is realized to complete the bionic motion. The average vertical distance is 0.13 m, the average diving speed is 0.015 m/s, and the horizontal swimming speed is 0.08 m/s. In addition to bionic actuators, bellows actuators are also one of the more common types. Bell M A et al. [26] proposed a simple and highly modular bidirectional soft actuator. The symmetrical bidirectional bellows structure actuator and peristaltic pump are integrated to realize a compact closed hydraulic system. It is experimentally verified that the actuator can achieve a specific bending angle using only 1/15 of the energy required and is more than four times more energy efficient than similarly sized soft actuators and pumping systems reported in the literature. More surprisingly, Giorgio-Serchi F et al. [27] proposed a soft hydraulic actuator using elastic energy storage for pulse jet propulsion of soft unmanned underwater vehicles. Its design is inspired by the swimming of octopuses. A micropump applies pressure to the soft actuator, which is then moved by releasing its elastic potential energy through a valve as needed. The peak hydraulic power amplification of soft actuators is about 75% relative to driving pumps.

Compared with fiber-constrained actuators, the pressure load of cavity actuators mainly depends on the elastic structure part with low hardness and high elongation. Cavity actuators generally have problems of a relatively low working pressure, load capacity, and actuation force. However, at the same time, the cavity actuator has better structural


compliance and is more suitable for some scenarios that do not require high actuation force but require high flexibility and compliance. The summary of hydraulic soft actuator based on mechanism research is shown in Table 1.

**Table 1.** Summary of hydraulic soft actuator based on mechanism research.

Hydraulic Soft Actuation Device	Structural Principles	Key Performance Parameters	Advantages	Challenges	Refs.
Hydraulic artificial muscles	Fiber constraint	(1) Elongation at 0.8 MPa is 50% (2) Bend into a semicircle at 0.3 MPa	Cheap, easy to manufacture and control	Less work pressure	Zhao W D et al. [20]
Water hydraulic fiber-guided actuator	Reinforcing fibers	Maximum torque: 0.063 N·m.	Large deformation and strong bearing capacity	/	Chen S et al. [21]
Bio-inspired soft hydraulic filament artificial muscle	Insertion method.	Aspect ratio: 5000; elongation: 246.8%; efficiency: 62.7%	Scalable, high actuation speed, high efficiency, and high aspect ratio	Lack of sensing system	Phan P T et al. [22]
Hydraulic equal-strain linear muscle	Soft pipe structure	Elongation: 160%	Large deformation, high efficiency	/	Drimer N et al. [23]
Bionic robotic fish	Two-joint cavity structure	Average speed: 0.29 fish length/s	High efficiency, continuous motion posture	Affected by external environmental pressure	Jiao L et al. [24]
Hydraulic soft robotic fish	Cavity structure	Average speed: 0.015 m/s; horizontal swimming speed: 0.08 m/s	Continuous bending within wide range	/	Katzschmann, R.K. et al. [25]
Modular bidirectional soft robot	Symmetrical bellows structure	More than four times the energy saving	Versatility, modularity, and compactness	Missing custom components	Bell M A et al. [26]
Elastic energy storage actuator	Elastic cavity structure	Peak hydraulic power amplification: 75%	High efficiency	Poor stability, nonlinear	Giorgio-Serchi F et al. [27]

### 3. Fabrication Materials

The soft actuation system’s main body and moving components are typically comprised of hyperelastic materials such as polymers, rubber, silicone, or other soft materials. Generally, these materials are created by 3D printers or molds, which allows for simple processing and affordable production. Meanwhile, their viscoelastic properties dissipate the energy of shocks and damp oscillations to eliminate discontinuous motion and forces. The proper material can make sure that the soft actuator withstands higher pressures, produces a larger output force, and can execute a variety of natural and flexible movements smoothly, as shown in Figure 2. The compliance, flexibility, and robustness of the system will be improved along with the actuation ability and efficiency of the soft actuation system as a result of ongoing research into more suitable and prospective actuation materials.

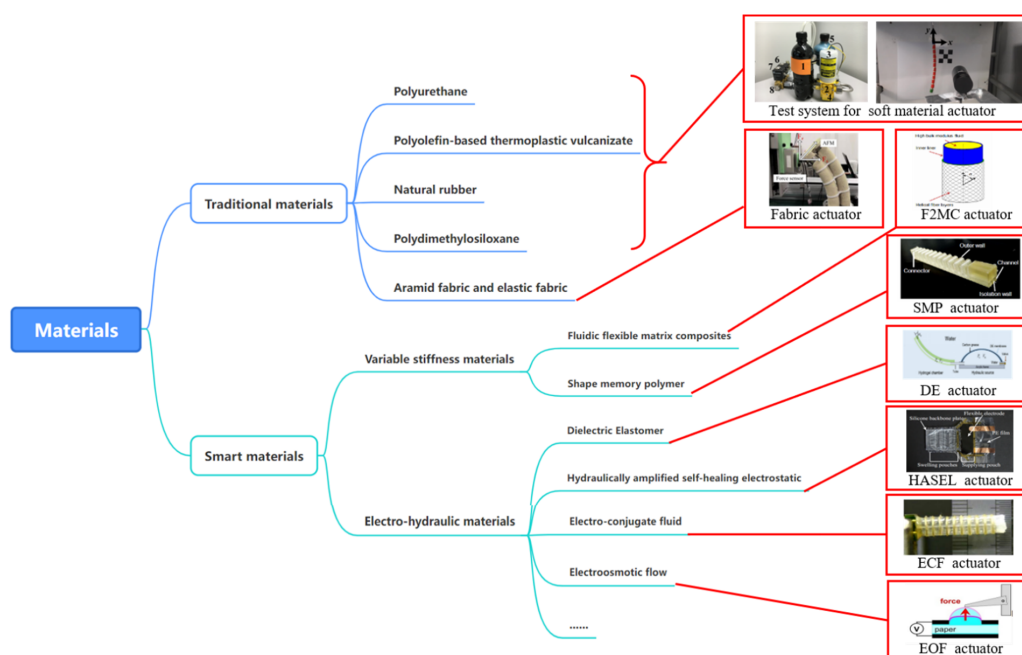

**Figure 2.** Fabrication materials of hydraulic powered soft actuators [28–47].

### 3.1. Traditional Materials

One of the most common soft actuators is based on anisotropic structures. In elastomers, such as McKibben actuators, that expand in the direction of the lowest modulus, pressurization or decompression by internal fluid generates stress. There are many variables that affect the actuation ability, such as shape, length, inner radius, outer radius, wall thickness, number of fiber turns, and fiber angle. There are few studies on the consequences of various elastomer material types in terms of materials. There are numerous additional possible elastomers that have not yet been researched and have the potential to produce better output effects. Kelageri et al. [28] investigated the effect of different elastomer types on the actuation performance of fiber-reinforced actuators. Comparative studies were conducted on four structurally identical actuators made of four different elastomers: polyurethane (PUR), polyolefin-based thermoplastic vulcanizate (TPE), natural rubber (NR), and polydimethylsiloxane (PDMS). According to the experimental performance analysis, under the same parameters, PDMS shows a higher bending angle, while the TPE material has higher mechanical properties.

In addition to the role of elastomeric materials, reinforcing fibers are also an important factor to improve the strength and actuation performance of soft actuators [16]. Reinforcing fibers can effectively avoid problems such as the easy tearing, puncturing, and tensile failure of soft materials. Y. Chen et al. [29] studied the hydraulic soft actuators of two new fabrics (knitted fabrics and elastic fabrics), aramid fabric actuator (AFA) and elastic fabric actuator (EFA), which are more anisotropic than traditional woven fabrics. They exploited the anisotropy of fabrics to develop high-strength, soft manipulator modules that yield high strength, large ranges of motion (ROM), and high stiffness. The experiments of the manipulators show that the AFA can generate a maximum output force of 608 N with a response time of 1.08 s. The EFA can generate a maximum output force of 534 N with a response time of 1.77 s.

### 3.2. Smart Materials

Various hydraulic soft actuation systems have emerged with the development of smart materials, opening a broad variety of application possibilities. Shape memory alloys (SMAs), ionic polymer metal composites (IPMCs), responsive hydrogels, and electroactive polymers (EAPs) have all recently been developed as smart materials, greatly advancing the practical application of soft actuation systems in the field of microstructures and promoting intelligent design of soft actuators.

#### 3.2.1. Variable Stiffness Actuator

A soft actuation system can achieve a variety of functions that a rigid actuation system cannot, such as the ability to adapt to unstructured environments, body compliance, safety for human-machine interaction, and excellent bending performance. However, compared with a rigid actuation system, a soft actuation system lack high rigidity, high load capacity, and motion accuracy. Soft actuators with variable stiffness bridge the gap between the traditional rigid actuation system and the soft actuation system, greatly increasing the application range of the soft actuation system. Variable stiffness of the soft actuator can be achieved by phase transitions, magnetorheological fluids, layer disturbances, and flexible shaft drives [30], and the development of smart materials also provides a new way to achieve variable stiffness performance of the soft actuator.

The variable stiffness research of the hydraulic soft actuator is mainly based on the interaction between structures or the variable stiffness properties of materials. Kim G W et al. [31] proposed a hydraulic soft actuator fabricated using the fluidic flexible matrix composites (F2MC). F2MC can contract, extend, or twist in response to the internal actuation pressure of the working fluid due to its exceptional anisotropic elastic characteristics. A wide range in variable stiffness performance may be obtained by altering the F2MC tube's design parameters, and it also features low axial stiffness and strong axial extensibility. Experiments have shown that the F2MC tube can provide variable stiffness through simple on/off valve

control; the transverse stiffness ratio of the closed valve state to open valve state is roughly estimated to be twice that when using the ratio of tip deflections. In addition to the structural interaction used to change the structural stiffness, the stiffness change in materials under specific stimuli can also be directly used to achieve the variable stiffness function. Liao T et al. [30] proposed a hydraulic soft actuator fabricated from fully 3D printed shape memory polymer (SMP). Additionally, they showed how it could be activated by fluid with a range of temperatures (20 °C to 50 °C). The actuator can go from a low stiffness state to a high stiffness state (20 °C to 50 °C) in 12 s when the input fluid is 80 °C and 0.2 MPa. It can also do this by adjusting the input pressure and temperature, which takes 21 s. The actuator also shows a change in output force from 0.17 N to 1.94 N by varying the temperature (20 °C–50 °C) and pressure (0–0.2 MPa) of the input fluid.

### 3.2.2. Electro-Hydraulic Actuator

Although hydraulic soft actuators are fast and powerful enough, there is limited room for system miniaturization and weight reduction because system implementations frequently call for the use of big pumps, numerous valves, and pipes. It is particularly challenging to design compact actuators utilizing the hydraulic soft actuation system's existing components. As a result, investigation into new soft actuators based on electro-hydraulic actuation is required in order to create a compact system with a hydraulic soft actuator.

A dielectric elastomer (DE) is an electroactive polymer featured by large strain with a maximum of up to 1692% [32], and it has the advantages of a high energy density, fast response, and low weight. By using the properties of DE materials, many scholars have carried out research on electro-hydraulic actuation soft actuators. Zhang M et al. [33] proposed a hydraulic soft actuator composed of a DE and hydrogel with excellent actuation performance. When the applied voltage reaches 5 kV, a maximum bending angle of 23° can be achieved with an internal pressure drop of 1.36 kPa. Palaniswamy M et al. [34] used a DE actuator for a soft robot. In order to overcome its main disadvantage of a low output force, a nanomaterial composite electrical insulator was added to increase the dielectric constant of the actuator. The results show that the maximum force output of the controlled insulator sample is increased by 72%. Lee D et al. [35] proposed an electro-hydraulic soft zipper actuator that can be used as a micropump. The actuator achieves a high displacement and actuation force through silicone oil, and improves durability against high voltage through the high dielectric breakdown voltage characteristics of silicone oil. The actuator shows the maximum force of 136 mN when the voltage of 4.7 kV is applied. Furthermore, the maximum displacement of the silicon film is 1.46 mm, and the fast response time is 39 ms. Xu S et al. [36] proposed an ultra-high power density dynamic DE actuator, which is actuated at 500 Hz or higher. Compared with the dynamic DE actuators in the previous work, the DE actuator generates a 300% higher blocking force, and the load power density reaches 290 W kg<sup>-1</sup> under working conditions.

Park T et al. [37,38] proposed a novel electro-hydraulic actuation gripper. The designed gripper utilizes a hydraulically amplified self-healing electrostatic (HASEL) actuator. Similar to the principle of a DE actuator, the HASEL unit consists of electrodes and an elastic soft bag containing the self-healing insulating liquid. When the voltage is applied to it, the positive and negative electrodes attract each other, thereby squeezing the liquid to generate a hydraulic actuation force. At 10.8 kV, the displacement value reached 41% of the length of the expansion bag [37]. The maximum blocking force of the electro-hydraulic gripper is 0.08 N. At a relative fluid volume of 0.5, the force per unit mass of the actuator is 8.57 N/kg [38]. Gyeongji Kang et al. [39] proposed a simple rectangular HASEL actuator. They compared the performance in terms of shape deformation such as the size or ratio of the actuator and electrodes. Kim S et al. [40] proposed a soft multimode actuator that utilizes the principle of HASEL to create different operating directions and modes. The maximum measured tip displacement of the actuator is approximately 4.28 mm, and the

twist angle is approximately  $9.8^\circ$ . Furthermore, bending and twisting are achieved in both directions, with a stable response within 1 Hz.

Electro-conjugate fluid (ECF) is a dielectric and functional fluid that can generate a powerful jet when subjected to a high DC voltage. While high voltage is required to generate the jet, the current is very low at a few microamps, which results in a total power dissipation of a few milliwatts. By using ECF, we can develop microfluidic actuation mechanical components without the need for any bulky pumps. Furthermore, it is clear that the power density of the ECF jet is higher when the electrode pair is miniaturized. Therefore, it is suitable for a miniaturized hydraulic soft actuator. The Takemura K team proposed a series of hydraulic soft actuation systems based on the ECF principle, and verified the performance of the mechanism through experiments: (1) a McKibben-type micro artificial muscle actuator based on the ECF effect [41]. The contraction of the ECF artificial muscle is 2.8 mm, and the generated force is 0.5 N; (2) the inchworm-type in-pipe mobile robot [42]. When a full-step input from 0 to 8 kV is applied, the full-step response is 1.3 s under unconstrained conditions, and is 0.4 s under equidistant conditions. When a pressure of 60 kPa is applied, the maximum axial elongation is 81.4%, and the maximum volume increase is 140.6%. This means that the maximum axial extension and maximum volume increase are 17.1 mm and 0.6 mL, respectively. The ECF pipe robot can move in a  $\phi 14$  mm acrylic pipe at a speed of 0.043 mm/s; (3) ECF fingers with bidirectional movement [43]. When the applied voltage is 4.5 kV, the ECF finger can achieve a bidirectional movement with a left displacement of 9.2 mm and a right displacement of 6.4 mm, and the maximum generated force is 6.6 mN.

The electroosmotic flow (EOF) effect can generate electroosmosis (EO) under the applied electric field, pumping fluids from one location in a device to another. Smela E et al. developed a series of hydraulic soft actuators based on EOF: (1) A novel polymer hydraulic actuator [44]. When the applied voltage is 10 kV, the maximum applied force is 3.7 g. The maximum deflection can reach 80% within 5 s and 94% within 10 s. (2) a voltage-controlled hydraulic actuator [45]. The microfluidic device employs a new benchtop lamination process. When the voltage is 600 V, the actuation stroke can reach 400  $\mu\text{m}$ , and forces can reach 30 g. The actuation speed is fast, and the time consumption is less than 0.1 s.

Cacucciolo V et al. [46] described a class of soft bidirectional pumps based on charge injection electrohydrodynamics (EHD). These pumps are flexible, stretchable, modular, expandable, quiet, and fast. For a temperature difference  $\Delta T = 6$  K and a flow rate  $Q = 100$   $\mu\text{L/s}$ , the power consumption of the pump is about 0.1 W, which shows its effectiveness as a wearable thermal regulation device. As a wearable actuation device, the actuator bends over  $40^\circ$  relative to its rest position. J. Avery et al. [47] proposed a self-sensing soft actuator with a conductive working fluid. Tomographic reconstruction is performed using six-electrode-based electrical impedance tomography (EIT), and a new frequency division multiplexing (FDM) EIT system is developed. Experiments show that the actuator can measure a 66 dB signal-to-noise ratio with a 20 ms temporal resolution.

In essence, the electro-hydraulic soft actuator is a new type of actuator that uses the electrical characteristics of a series of new intelligent materials to enable the hydraulic fluid to achieve controllable movement in a small or even microscale. Electro-hydraulic soft actuators are generally characterized by a high power density and small size and weight, which makes them have great application potential in biological, medical, and other fields. However, the complex electrical–mechanical characteristics of intelligent materials and the motion hysteresis of soft materials make the control of electro-hydraulic soft actuators an urgent problem. The summary of hydraulic soft actuator based on material is shown in Table 2.

**Table 2.** Summary of hydraulic soft actuator based on material.

Hydraulic Soft Actuation Device	Principles	Key Performance Parameters	Advantages	Challenges	Refs.
Fiber-reinforced actuator	Different elastic material moduli and anisotropy	TPE has the best force performance, and PDMS has the best bending performance.	/	/	Kelageri et al. [28]
Hydraulic soft manipulator	Anisotropy, stretchability, and inherently high strength properties of fabrics	AFA: maximum output force: 608 N, response time: 1.08 s EFA: maximum output force: 534 N; response time: 1.77 s	Greater anisotropy, high strength, large ROM, and high stiffness	/	Y. Chen et al. [29]
Variable stiffness actuator	F2MC tube	Axial shrinkage strain of 14%	High power density and lighter weight	Lack of accurate model	Kim G W et al. [31]
SMP 3D printed actuator	Phase transition properties of SMP	Stiffness variation: 18 mN/mm ~519 mN/mm; bend angle: 160°	Large stiffness changes and bending angles	High maintenance cost and low frequency	Liao T et al. [30]
Soft hydraulic robot	DE principle	Maximum bend angle: 23°	High energy density, fast response, low energy consumption, and low weight	Difficult to model accurately	Zhang M et al. [33]
DE actuator	DE principle; increase the dielectric constant	Maximum force output increased: 72%	Higher output force	Oxidation of dielectric fluid	Palaniswamy M et al. [34]
Soft zipper actuator	DE principle; high dielectric breakdown voltage characteristics	Maximum force: 136 mN; maximum displacement: 1.46 mm; response time: 39 ms	High displacement and actuation force, high pressure resistance	Poor performance at high voltage	Lee D et al. [35]
DEA valve	DE principle	Actuation frequency: 500 Hz; blocking force increased: 300%; load power density: 290 W/kg	High power density, light weight and compact structure	Electrical-mechanical instability	Xu S et al. [36]
Soft robot gripper	HASEL principle	Displacement: 41% of the length; maximum output force: 0.08 N; mass specific power: 8.57 N/kg	High flexibility, easy to transplant	/	Park T et al. [37,38]
Soft multimode actuator	HASEL principle	Displacement: 4.28 mm; torsion angle: 9.8°; operating frequency: 1 Hz	Complex and flexible deformability	/	Kim S et al. [40]
ECF hydraulic soft actuation system	ECF principle	(1) Micro artificial muscle actuator, contraction: 2.8 mm; force: 0.5 N (2) In-pipe mobile robot, maximum axial extension rate: 81.4%; maximum volume increase rate: 140.6% (3) Fingers with bidirectional movement, left displacement: 9.2 mm; right displacement: 6.4 mm; maximum output force: 6.6 mN	Fast deformation, small size	High voltage supply, less force	Takemura K et al. [41–43]
EOF hydraulic soft actuator	EOF principle	(1) Polymer hydraulic actuator, maximum deflection: 350 $\mu$ m; maximum force: 3.7 g (2) The voltage-controlled hydraulic actuator, actuation stroke: 400 $\mu$ m; force: 30 g; response time: 0.1 s	Fast deformation and simple structure	Difficult to ensure liquid pH stability	Smela E et al. [44,45]
Soft bidirectional pump	EHD principle	Power consumption: 0.1 W; bending angel: >40°	Flexible, stretchable, modular, scalable, quiet, and fast	Ag electrode requires high voltage, and C electrode life is limited.	Cacucciolo V et al. [46]
Self-sensing soft actuator	Electrical impedance tomography	Measure 66 dB SNR with 20 ms temporal resolution	Low cost, low complexity, and small form factor	Mechanical lag	J. Avery et al. [47]

## 4. Control Strategy

Typically, hydraulic soft actuators produce internal fluid pressure to control their retraction and extension movements. Hysteretic nonlinearity is caused by a difference between the relationship among contraction and internal pressure during compression and decompression due to the material's elasticity and friction between the elastomer and the fibers. Furthermore, the hysteresis curve is distorted based on the rate of contraction and extension as well as the force delivered to the actuator. This complex nonlinear behavior can lead to inaccurate and difficult control of the hydraulic soft actuator. It is of great significance to study the accurate modeling method and advanced control strategy of soft actuators to improve the actuation efficiency and system robustness of hydraulic soft actuators.

### 4.1. Control Strategies Based on Model

Mathematical modeling is the basic step for designing a controller with higher performance. Many scholars have further improved the control performance of hydraulic soft actuators based on the establishment of accurate models and incorporating control strategies. A model-based control and adaptive parameter estimation method was put out by Kobayashi W et al. [48]. Recursive least squares (RLS) is an adaptive identification technique that the system uses to update parameters changing with demand. Additionally, it makes up for modifications in muscle characteristics brought on by garments such as inner tubes and sleeves. Liu S et al. [49] deduced the dynamic equation of the hydraulic rigid-flexible manipulator by using the Lagrangian principle and hypothetical mode method, and proposed an integral sliding mode control scheme. The stability of the closed-loop system is proved by using the Lyapunov function. The simulation results demonstrate that the approach is capable of achieving the required levels of vibration suppression and ballistic tracking performance. Slightam J E et al. [50] introduced a sliding mode impedance control method for hydraulic artificial muscles based on the Filippov equivalent dynamics principle. A nonlinear lumped parameter model of the system is proposed, and a sliding mode impedance controller is derived. Experiments show that the model-based approach outperforms the classical approach for hydraulic artificial muscles with a 41% reduction in maximum tracking error. Feng Y et al. [51] proposed a second-order impedance control strategy with braking method. The results show that with the proposed impedance control, the hydraulic soft manipulator can easily move with external forces of several kilograms and can safely cope with sudden load changes at low angular velocity. Cao G et al. [52] proposed an observer-based continuous adaptive sliding mode controller, which consists of a HOSM-based observer, a nonsingular fast terminal sliding mode surface, and an STA-based controller. Experiments show that under this control scheme, the proposed control scheme has an adaptive tuning gain, continuity, no singularity, stronger robustness, and a higher tracking accuracy.

In general, model-based control is used to design the controller and conduct parameter tuning on the premise that the target model is known or can be established. Therefore, the effect of converting the controller obtained under model-based verification into an actual controller is consistent.

### 4.2. Control Strategy Based on Data

For some controlled targets, it is difficult to establish accurate mathematical models, or it is impossible to establish a mathematical model at all. In this case, the model-based control method is difficult to achieve good control effect in practice, and it is even difficult to design an appropriate controller. Thus, the data-driven modeling method is more effective. Kawahara Y et al. [53,54] created a water hydraulic artificial muscle actuator model with a least squares support vector machine (LS-SVM) by using experimentally obtained data, and showed that the proposed model can capture the hysteresis characteristics of the actuator. After this, the state space model of the water hydraulic artificial muscle actuator system was constructed. The model predictive control system is designed on the

basis that the proposed LS-SVM model is added to the state space model. Experiments show that the proposed control method has a shorter rise time and smaller tracking error. Tsuruhara S et al. [55] proposed a dynamically linearized data model for the design of model-free adaptive control (MFAC). On this basis, a set of estimation laws and control laws for multiobjective control were derived. Compared with traditional MFAC, MFAC based on virtual reference feedback tuning (VRFT) has a higher control performance for muscles, especially in transient response. Wang T et al. [56] developed a simplified data analysis model to reveal the relationship between the hydraulic pressure, bending angle, and contact force of a soft actuator. The bending angle and hydraulic pressure are measured by vision and pressure sensors, and the output force of the soft actuator is estimated from the model. The estimation method is applied to the closed-loop control of the contact force so that good dynamic and stable control performance can be achieved. Xu H et al. [57] introduced a constant fluid mass control (CFMC) strategy for soft fluid actuators, and proposed a neural network-based supervised learning algorithm for precise pressure control of soft fluid actuators. The results show that the algorithm can predict actuation pressure with 99% accuracy. Sugiyama T et al. [58] proposed a feedforward control method for soft actuators including a simple feedforward neural network (FNN) and an iterative learning controller (ILC). Feedforward neural networks (FNNs) can efficiently learn and obtain inverse models of soft actuators. The results show that the ILC can learn and compensate the deformability of the actuator well.


The data-driven modeling method requires a lot of experimental data of each hydraulic soft actuator, but the model's predicted outcomes are more suited to the conditions of real application and are more precise. A short data collecting time, however, will result in poor model performance and control outcomes. The summary of control strategy for hydraulic soft actuator is shown in Table 3.

**Table 3.** Summary of control strategy for hydraulic soft actuator.

Control Strategies and Algorithms	Control Target	Performances	Advantages	Challenges	Refs.
Model-based control and adaptive parameter estimation	Water hydraulic artificial muscle	Improve performance under load conditions	There is no need to redesign gains or re-identify muscle models	/	Kobayashi W, et al. [48]
Controller of integral sliding mode and hyperbolic tangent functions	Hydraulic soft manipulator	Stable tracking time for three joints: 0.9 s, 1.3 s, 1.3 s	Short tracking time, good jitter suppression	/	Liu S, et al. [49]
Model-based sliding mode impedance control	Hydraulic artificial muscle	Maximum tracking error is reduced by 41% compared to the classic HAM	Superior performance in tracking position and stiffness.	/	Slightam J E, et al. [50]
Second-order impedance control	Hydraulic artificial muscle	Maximum pressure: <5.0 Mpa	Larger phase margin and better stability.	/	Feng Y, et al. [51]
Observer-based continuous adaptive sliding mode control	Fluid soft fingers	The tracking error of the closed-loop system converges to zero	Continuity, adaptability, strong robustness.	High-gain oscillations due to singularity problem	Cao G, et al. [52]
Least squares support vector machines and model predictive control	Hydraulic artificial muscle	The model describes the hysteresis effect well	Shorter rise time and smaller tracking error.	/	Kawahara Y, et al. [53,54]
Model-free adaptive control	Hydraulic artificial muscle	Steady-state response: 5.2 $\mu$ m; maximum overshoot of transient response: 0.33 mm	Higher tracking control performance without overshoot	Robustness under load needs to be verified.	Tsuruhara S, et al. [55]
Contact force estimation method based on control law	Hydraulic soft gripper	Average response time: 0.90 s; average steady-state error: 0.21 N; average overshoot: 4.3%	The use of sensors is reduced.	/	Wang T, et al. [56]
Constant fluid quality control strategy & supervised learning algorithm for neural network	Fluid soft actuator	Prediction accuracy: 99%	Larger output force dynamic range, faster response time, and higher pressure control resolution.	External force will reduce the accuracy of neural network modeling.	Xu H, et al. [57]
Iterative learning neural network feedforward controller	Hydraulic soft finger	Accurate tracking performance, RMSE: $2.11 \pm 0.35^\circ$	Accurate tracking performance and low latency	/	Sugiyama T, et al. [58]

## 5. Recommended Applications

With the continuous study of hydraulic soft actuators by researchers, the inherent flexibility and compliance of hydraulic soft actuators show their great advantages over traditional rigid actuators, enabling them to better adapt to different environments and tasks. Hydraulic soft actuators are now capable of cooperating with a variety of smart materials and structures, which demonstrates the multifunctional development trend in the microstructure actuator industry in recent years. Therefore, due to its unique actuation performance, a hydraulic soft actuator has good application prospects in environments that require a high load and high safety requirement, such as soft gripper, soft robotic manipulator, bionic robot, interactive robot, assistance wearable robot, and so on, as shown in Figure 3.

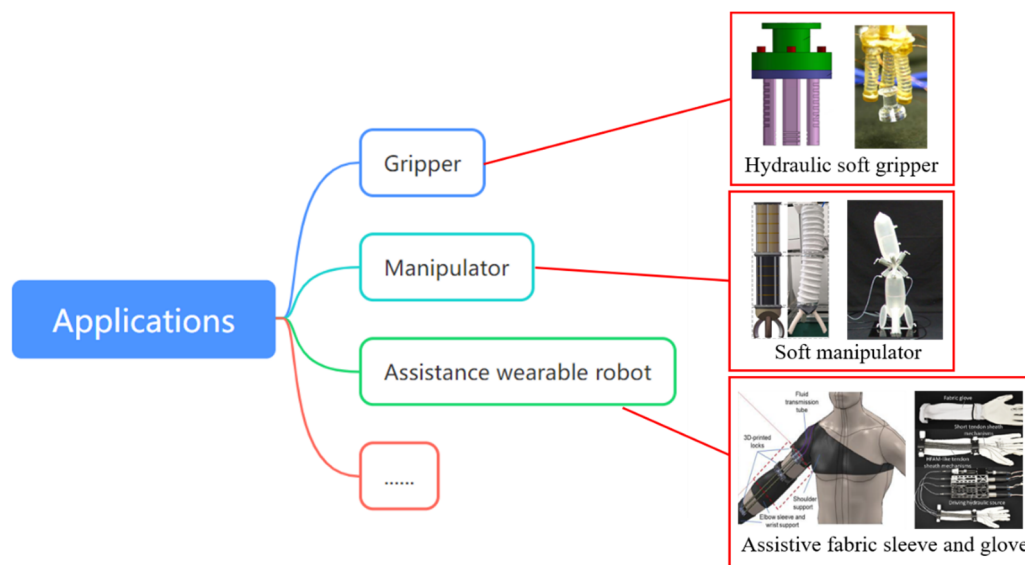

**Figure 3.** Recommended applications of hydraulic powered soft actuators [22,29,43,59–61].

The most common applications of hydraulic soft actuators are in grippers, manipulators, and assistance wearable robots. Nie S L et al. [59] developed a hydraulic soft gripper that consists of three hydraulic soft actuators, where the soft gripper can maximally imitate the hand-gripping function. Takemura K et al. [43] developed an electro-conjugated fluid (ECF) finger and applied it on a soft gripper. Experimental results show that ECF hands are flexible enough to grasp and release objects. Y. Chen et al. [29] designed a hydraulic soft manipulator in the shape of an elephant trunk. By filling gas with different pressures into three actuators, the manipulator can be adapted to grip objects of various shapes, stiffnesses, and weights within a certain range. Kimura H et al. [60] proposed a hydraulic bag soft manipulator. Experiments show that the manipulator is flexible enough to grab raw eggs without complex controls such as force sensing. Sy L et al. [61] designed an upper-limb assistive robotic fabric sleeve based on a fabric garment and low-hysteresis hydraulic soft artificial muscles. They demonstrated its great potential in rehabilitation applications. Phan P T et al. [22] developed and evaluated an HFAM soft fabric glove that can help grasp a variety of objects. The results show that the soft wearable glove can perform a variety of arbitrary surface grasping tasks, including with apples, lemons, 500 g weights, and glass beakers.

With the deepening of research on hydraulic soft actuators, their application has gradually matured, and a multifunctional development direction has been developed, which has greatly expanded their application. However, at the same time, the problems of hydraulic soft actuators in terms of system reliability and motion control have always restricted their large-scale application.

## 6. Discussion

Although there have been many remarkable achievements in the development of hydraulic soft actuators, there are still certain issues and challenges. The main points are suggested as follows: (1) For complex working environments, there is still a lack of a systematic design method of a soft actuator. (2) The application of hydraulic soft actuators using smart materials in the field of microstructures still suffers from poor reliability and poor electromechanical properties. (3) Due to the inherent hysteresis and nonlinear characteristics of the soft actuator, the control of the hydraulic soft actuator is managed with significant difficulties and uncertainties. In addition, the leakage of the working fluids of the hydraulic soft actuator are also a concern as these are harmful to environment.

The research effort undertaken on the modeling and control of hydraulic soft actuators has been relatively small. It is difficult to build an accurate model due to the structural diversity of hydraulic soft actuators, which presents certain challenges to the design of model-based controllers. Furthermore, data-driven controllers require laborious, time-consuming data acquisition and machine learning to compensate for this unique uncertainty. Therefore, to develop a general modeling framework, precise modeling methods and advanced control strategies are promising directions for the future.

There are still many problems and challenges in the design and control of hydraulic soft actuators. By starting from the three aspects of mechanism design, material selection, and control strategy, the hydraulic soft actuator can be gradually optimized and improved in terms of its flexibility, strength, and efficiency. In the future, integration, smartness, and miniaturization are all areas for research in the development of hydraulic soft actuators, in response to the various potential applications.

## 7. Conclusions

In this paper, the research progress of various hydraulic soft actuators is summarized, and their advantages and disadvantages are illustrated from the three aspects of mechanism design, material science, and control strategy. In addition, the state-of-the-art technology, application scenarios and development trend of hydraulic soft actuation technology are introduced, and the problems, and challenges of hydraulic soft actuators are analyzed. This paper will support future research in identifying the most recent developments in hydraulic soft actuator technology. Even though this field has seen some remarkable advancements, there are still numerous study topics and directions to be investigated. By striving to pursue a hydraulic soft actuation system with greater actuation capability and higher power efficiency through extensive multidisciplinary research, exciting development prospects will be realized in this field.

**Author Contributions:** Conceptualization, H.S. and K.T.; methodology, K.T.; data collection, W.L.; writing—original draft preparation, K.T. and B.Z.; writing—review and editing, H.S. and B.Z.; supervision, H.S.; funding acquisition, H.S. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research was funded by the National Natural Science Foundation of China, grant number 52075412.

**Data Availability Statement:** Public databases.

**Conflicts of Interest:** The authors declare no conflict of interest.

## References

1. Apsite, I.; Salehi, S.; Ionov, L. Materials for Smart Soft Actuator Systems. *Chem. Rev.* **2021**, *122*, 1349–1415. [[CrossRef](#)] [[PubMed](#)]
2. Wang, T.; Hao, Y.; Yang, X.; Wen, L. Soft robotics: Structure, actuation, sensing and control. *J. Mech. Eng.* **2017**, *53*, 1–13.
3. Suzumori, K.; Endo, S.; Kanda, T.; Kato, N.; Suzuki, H. A bending pneumatic rubber actuator realizing soft-bodied manta swimming robot. In Proceedings of the 2007 IEEE International Conference on Robotics and Automation, Rome, Italy, 10–14 April 2007; IEEE: Piscataway, NJ, USA, 2007; pp. 4975–4980.
4. Seok, S.; Onal, C.D.; Cho, K.-J.; Wood, R.J.; Rus, D.; Kim, S. Meshworm: A Peristaltic Soft Robot With Antagonistic Nickel Titanium Coil Actuators. *IEEE/ASME Trans. Mechatron.* **2012**, *18*, 1485–1497. [[CrossRef](#)]

5. Godaba, H.; Li, J.; Wang, Y.; Zhu, J. A Soft Jellyfish Robot Driven by a Dielectric Elastomer Actuator. *IEEE Robot. Autom. Lett.* **2016**, *1*, 624–631. [[CrossRef](#)]
6. Takishima, Y.; Yoshida, K.; Khosla, A.; Kawakami, M.; Furukawa, H. Fully 3D-Printed Hydrogel Actuator for Jellyfish Soft Robots. *ECS J. Solid State Sci. Technol.* **2021**, *10*, 037002. [[CrossRef](#)]
7. Wu, Y.; Yim, J.K.; Liang, J.; Shao, Z.; Qi, M.; Zhong, J.; Luo, Z.; Yan, X.; Zhang, M.; Wang, X.; et al. Insect-scale fast moving and ultrarobust soft robot. *Sci. Robot.* **2019**, *4*, eaax1594. [[CrossRef](#)]
8. Zhu, Q.; Liu, Q.; Yang, M.; Wang, X. Structural and Mechanical Characteristics of a Capsule-Type Soft Pneumatic Actuator with Large Thrust Force and High-Contraction Ratio. *Math. Probl. Eng.* **2020**, *2020*, 5783653. [[CrossRef](#)]
9. Bogdeviius, M.; Karpenko, M.; Bogdeviius, P. Determination of rheological model coefficients of pipeline composite material layers based on spectrum analysis and optimization. *J. Theor. Appl. Mech.* **2021**, *59*, 265–278. [[CrossRef](#)]
10. Calisti, M.; Picardi, G.; Laschi, C. Fundamentals of soft robot locomotion. *J. R. Soc. Interface* **2017**, *14*, 20170101. [[CrossRef](#)]
11. Hong, K.Y.; Hui, Y.N.; Yeow, C.H. High-Force Soft Printable Pneumatics for Soft Robotic Applications. *Soft Robot.* **2016**, *3*, 144–158.
12. Katzschmann, R.K.; DelPreto, J.; MacCurdy, R.; Rus, D. Exploration of underwater life with an acoustically controlled soft robotic fish. *Sci. Robot.* **2018**, *3*, aar3449. [[CrossRef](#)] [[PubMed](#)]
13. Ariyanto, M.; Setiawan, J.D.; Ismail, R.; Haryanto, I.; Febrina, T.; Saksono, D.R. Design and characterization of low-cost soft pneumatic bending actuator for hand rehabilitation. In Proceedings of the 2018 5th International Conference on Information Technology, Computer, and Electrical Engineering (ICITACEE), Semarang, Indonesia, 27–28 September 2018; IEEE: Piscataway, NJ, USA, 2018; pp. 45–50.
14. Sun, Y.; Liu, Y.; Pancheri, F.; Lueth, T.C. LARG: A Lightweight Robotic Gripper With 3-D Topology Optimized Adaptive Fingers. *IEEE/ASME Trans. Mechatron.* **2022**, *27*, 2026–2034. [[CrossRef](#)]
15. Zhang, Z.; Chen, G.; Wu, H.; Kong, L.; Wang, H. A Pneumatic/Cable-driven Hybrid Linear Actuator with Combined Structure of Origami Chambers and Deployable Mechanism. *IEEE Robot. Autom. Lett.* **2020**, *5*, 3564–3571. [[CrossRef](#)]
16. Bishop-Moser, J.; Kota, S. Design and Modeling of Generalized Fiber-Reinforced Pneumatic Soft Actuators. *IEEE Trans. Robot.* **2015**, *31*, 536–545. [[CrossRef](#)]
17. Zhang, H.; Kumar, A.S.; Chen, F.; Fuh, J.Y.H.; Wang, M.Y. Topology Optimized Multimaterial Soft Fingers for Applications on Grippers, Rehabilitation, and Artificial Hands. *IEEE/ASME Trans. Mechatron.* **2018**, *24*, 120–131. [[CrossRef](#)]
18. Greer, J.D.; Morimoto, T.K.; Okamura, A.M.; Hawkes, E.W. Series pneumatic artificial muscles (sPAMs) and application to a soft continuum robot. In Proceedings of the 2017 IEEE International Conference on Robotics and Automation (ICRA), Singapore, 29 May–3 June 2017; IEEE: Piscataway, NJ, USA, 2017; pp. 5503–5510.
19. Sangian, D.; Naficy, S.; Spinks, G.M.; Tondou, B. The effect of geometry and material properties on the performance of a small hydraulic McKibben muscle system. *Sens. Actuators A Phys.* **2015**, *234*, 150–157. [[CrossRef](#)]
20. Zhao, W.; Xu, H.; Ma, Y.; Xu, Y. Design and Experimental Test of the Contractive and Elongate Water Hydraulic Flexible Manipulators. In Proceedings of the 2017 IEEE International Conference on Robotics and Biomimetics (ROBIO), Macau, Macao, 5–8 December 2017; pp. 1503–1508.
21. Chen, S.; Xu, H.; Wei, Q.; Fan, W. Modeling, Analysis, and Experimental Results of the Skeleton-Embedded Fiber-Guided Water Hydraulic Actuator. In Proceedings of the 2021 IEEE International Conference on Robotics and Biomimetics (ROBIO), Sanya, China, 27–31 December 2021; IEEE: Piscataway, NJ, USA, 2021; pp. 136–142.
22. Phan, P.T.; Thai, M.T.; Hoang, T.T.; Lovell, N.H.; Do, T.N. HFAM: Soft Hydraulic Filament Artificial Muscles for Flexible Robotic Applications. *IEEE Access* **2020**, *8*, 226637–226652. [[CrossRef](#)]
23. Drimer, N.; Mendelson, J.; Peleg, A. A new type of hydraulic muscle. *Actuators* **2016**, *5*, 3. [[CrossRef](#)]
24. Jiao, L.; Zhang, B.; Zhang, K.; Bo, Z. Design and simulation of two-joint pressure-driven soft bionic fish. *Chin. J. Theor. Appl. Mech.* **2020**, *52*, 817–827.
25. Katzschmann, R.K.; Marchese, A.D.; Rus, D. Hydraulic autonomous soft robotic fish for 3D swimming. In *Experimental Robotics*; Springer: Cham, Switzerland, 2016; pp. 405–420.
26. Bell, M.A.; Gorissen, B.; Bertoldi, K.; Weaver, J.C.; Wood, R.J. A Modular and Self-Contained Fluidic Engine for Soft Actuators. *Adv. Intell. Syst.* **2021**, *4*, 2100094. [[CrossRef](#)]
27. Giorgio-Serchi, F.; Lidtke, A.K.; Weymouth, G.D. A Soft Aquatic Actuator for Unsteady Peak Power Amplification. *IEEE/ASME Trans. Mechatron.* **2018**, *23*, 2968–2973. [[CrossRef](#)]
28. Kelageri, M.M.; Heikkilä, M.; Poikelispää, M.; Ghabcheloo, R.; Linjama, M.; Vuorinen, J. Design, fabrication and control of a hydraulic elastomer actuator. *arXiv* **2018**, arXiv:1806.04894.
29. Chen, Y.; Zhang, J.; Gong, Y. Utilizing Anisotropic Fabrics Composites for High-Strength Soft Manipulator Integrating Soft Gripper. *IEEE Access* **2019**, *7*, 127416–127426. [[CrossRef](#)]
30. Liao, T.; Kalairaj, M.S.; Cai, C.J.; Tse, Z.T.H.; Ren, H. Fully-Printable Soft Actuator with Variable Stiffness by Phase Transition and Hydraulic Regulations. *Actuators* **2021**, *10*, 269. [[CrossRef](#)]
31. Kim, G.-W.; Li, S.; Wang, K.W. Variable stiffness actuator based on fluidic flexible matrix composites and piezoelectric-hydraulic pump. *Proc. SPIE* **2010**, *7643*, 76431. [[CrossRef](#)]
32. Li, T.; Keplinger, C.; Baumgartner, R.; Bauer, S.; Yang, W.; Suo, Z. Giant voltage-induced deformation in dielectric elastomers near the verge of snap-through instability. *J. Mech. Phys. Solids* **2013**, *61*, 611–628. [[CrossRef](#)]

33. Zhang, M.; Li, G.; Yang, X.; Xiao, Y.; Yang, T.; Wong, T.-W.; Li, T. Artificial muscle driven soft hydraulic robot: Electromechanical actuation and simplified modeling. *Smart Mater. Struct.* **2018**, *27*, 095016. [[CrossRef](#)]
34. Palaniswamy, M.; Herzog, M.; Panwar, S.; Jones, M.; Rowe, M. Increasing performance of soft dielectric elastomer artificial muscles via nanomaterial composite electrical insulators. *MRS Adv.* **2022**, *7*, 533–537. [[CrossRef](#)]
35. Lee, D.; Kwak, B.; Bae, J. Development of an Electro-hydraulic Soft Zipping Actuator with Self-sensing Mechanism. *J. Korea Robot. Soc.* **2021**, *16*, 79–85. [[CrossRef](#)]
36. Xu, S.; Chen, Y.; Hyun, N.-S.P.; Becker, K.P.; Wood, R.J. A dynamic electrically driven soft valve for control of soft hydraulic actuators. *Proc. Natl. Acad. Sci. USA* **2021**, *118*, e2103198118. [[CrossRef](#)]
37. Park, T.; Cha, Y. Soft gripper actuated by electro-hydraulic force. In Proceedings of the Electroactive Polymer Actuators and Devices (EAPAD) XXI, Denver, CO, USA, 4–7 March 2019; SPIE: Bellingham, WA, USA, 2019; Volume 10966, pp. 236–241.
38. Park, T.; Kim, K.; Oh, S.-R.; Cha, Y. Electrohydraulic Actuator for a Soft Gripper. *Soft Robot.* **2020**, *7*, 68–75. [[CrossRef](#)] [[PubMed](#)]
39. Kang, G.; Song, K. Soft Actuator Development for Artificial Muscle. *J. Korea Robot. Soc.* **2021**, *16*, 17–22. [[CrossRef](#)]
40. Kim, S.; Cha, Y. Electrohydraulic actuator based on multiple pouch modules for bending and twisting. *Sens. Actuators A Phys.* **2022**, *337*, 113450. [[CrossRef](#)]
41. Yokota, S.; Yajima, F.; Takemura, K.; Edamura, K. Electro-Conjugate Fluid Jet-Driven Micro Artificial Antagonistic Muscle Actuators and their Integration. *Adv. Robot.* **2010**, *24*, 1929–1943. [[CrossRef](#)]
42. Yamaguchi, A.; Takemura, K.; Yokota, S.; Edamura, K. An In-Pipe Mobile Robot Using Electro-Conjugate Fluid. *J. Adv. Mech. Des. Syst. Manuf.* **2011**, *5*, 214–226. [[CrossRef](#)]
43. Nagaoka, T.; Mao, Z.; Takemura, K.; Yokota, S.; Kim, J.-W. ECF (electro-conjugate fluid) finger with bidirectional motion and its application to a flexible hand. *Smart Mater. Struct.* **2019**, *28*, 025032. [[CrossRef](#)]
44. Piyasena, M.E.; Shapiro, B.; Smela, E. A new EAP based on electroosmotic flow: Nastic actuators. In Proceedings of the Electroactive Polymer Actuators and Devices (EAPAD), San Diego, CA, USA, 9–12 March 2009; SPIE: Bellingham, WA, USA, 2009; Volume 7287, pp. 595–604.
45. Sritharan, D.; Smela, E. Fabrication of a Miniature Paper-Based Electroosmotic Actuator. *Polymers* **2016**, *8*, 400. [[CrossRef](#)]
46. Cacucciolo, V.; Shintake, J.; Kuwajima, Y.; Maeda, S.; Floreano, D.; Shea, H. Stretchable pumps for soft machines. *Nature* **2019**, *572*, 516–519. [[CrossRef](#)]
47. Avery, J.; Runciman, M.; Darzi, A.; Mylonas, G.P. Shape sensing of variable stiffness soft robots using electrical impedance tomography. In Proceedings of the 2019 International Conference on Robotics and Automation (ICRA), Montreal, QC, Canada, 20–24 May 2019; IEEE: Piscataway, NJ, USA, 2019; pp. 9066–9072.
48. Kobayashi, W.; Ito, K.; Yamamoto, S.-I. Displacement Control of Water Hydraulic McKibben Muscles with Load Compensation. *JFPS Int. J. Fluid Power Syst.* **2014**, *8*, 107–112. [[CrossRef](#)]
49. Liu, S.; Liu, J.; Li, Y. Trajectory tracking and vibration control of vehicle hydraulic rigid—Flexible manipulator with input constraints. In Proceedings of the 2017 Chinese Automation Congress (CAC), Jinan, China, 20–22 October 2017; IEEE: Piscataway, NJ, USA, 2017; pp. 6861–6866.
50. Slightam, J.E.; Nagurka, M.L.; Barth, E.J. Sliding mode impedance control of a hydraulic artificial muscle. In Proceedings of the Dynamic Systems and Control Conference, Atlanta, GA, USA, 30 September–3 October 2018; American Society of Mechanical Engineers: New York, NY, USA, 2018. V001T13A003. Volume 51890.
51. Feng, Y.; Ide, T.; Nabae, H.; Endo, G.; Sakurai, R.; Ohno, S.; Suzumori, K. Safety-enhanced control strategy of a power soft robot driven by hydraulic artificial muscles. *ROBOMECH J.* **2021**, *8*, 1–16. [[CrossRef](#)]
52. Cao, G.; Liu, Y.; Jiang, Y.; Zhang, F.; Bian, G.; Owens, D.H. Observer-based continuous adaptive sliding mode control for soft actuators. *Nonlinear Dyn.* **2021**, *105*, 371–386. [[CrossRef](#)]
53. Kawahara, Y.; Kosaki, T.; Li, S. Control of a water-hydraulic artificial muscle actuator using a hysteresis model based on least squares support vector machines. In Proceedings of the SICE Annual Conference, Hiroshima, Japan, 10–13 September 2019; pp. 1020–1023.
54. Kawahara, Y.; Kosaki, T.; Li, S. LS-SVM Based Modeling and Model Predictive Control for a Water-Hydraulic Artificial Muscle Actuator. *SICE J. Control. Meas. Syst. Integr.* **2020**, *13*, 114–121. [[CrossRef](#)]
55. Tsuruhara, S.; Ito, K. Data-Driven Model-Free Adaptive Displacement Control for Tap-Water-Driven Artificial Muscle and Parameter Design Using Virtual Reference Feedback Tuning. *J. Robot. Mechatron.* **2022**, *34*, 664–676. [[CrossRef](#)]
56. Wang, T.; Sun, E.; Zhu, S. Contact force estimation of hydraulic soft bending actuators for gripping. *Adv. Robot.* **2021**, *35*, 1098–1106. [[CrossRef](#)]
57. Xu, H.; Agarwal, P.; Stephens-Fripp, B. Constant Fluidic Mass Control for Soft Actuators Using Artificial Neural Network Algorithm. In Proceedings of the 2021 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), Prague, Czech Republic, 27 September–1 October 2021; IEEE: Piscataway, NJ, USA, 2021; pp. 1732–1739.
58. Sugiyama, T.; Kutsuzawa, K.; Owaki, D.; Hayashibe, M. Individual deformability compensation of soft hydraulic actuators through iterative learning-based neural network. *Bioinspiration Biomim.* **2021**, *16*, 056016. [[CrossRef](#)] [[PubMed](#)]
59. Nie, S.; Liu, X.; Ji, H.; Ma, Z.; Yin, F. Simulation and Experiment Study on Deformation Characteristics of the Water Hydraulic Flexible Actuator Used for the Underwater Gripper. *IEEE Access* **2020**, *8*, 191447–191459. [[CrossRef](#)]

- 
60. Kimura, H.; Kataoka, M.; Suzuki, S.; Akimoto, D.; Inou, N. A Flexible Robotic Arm with Hydraulic Skeleton. *J. Adv. Mech. Des. Syst. Manuf.* **2012**, *6*, 1107–1120. [[CrossRef](#)]
  61. Sy, L.; Hoang, T.T.; Bussu, M.; Thai, M.T.; Phan, P.T.; Low, H.; Do, T.N. M-SAM: Miniature and Soft Artificial Muscle-Driven Wearable Robotic Fabric Exosuit for Upper Limb Augmentation. In Proceedings of the 2021 IEEE 4th International Conference on Soft Robotics (RoboSoft), New Haven, CT, USA, 12–16 April 2021; IEEE: Piscataway, NJ, USA, 2021; pp. 575–578.